


# エジェクタガイドピン ストレートタイプ(タップ付)

EJECTOR GUIDE PIN

CAD FILE

EGPA

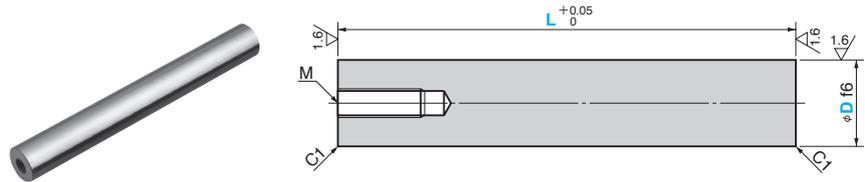

材質 SUJ2  
硬さ HRC58以上  
高周波焼入れ

D f6	M	Catalog No.	D	L (指定5mm単位)
25	M10 深さ20	EGPA	25	50~100
				105~125
				130~150
				155~175
				180~200
				205~225
				230~250
				255~275
				280~300
				305~325
30	M12 深さ25	EGPA	30	330~350
				105~125
				130~150
				155~175
				180~200
				205~225
				230~250
				255~275
				280~300
				305~325
35	M12 深さ25	EGPA	35	330~350
				105~125
				130~150
				155~175
				180~200
				205~225
				230~250
				255~275
				280~300
				305~325

D f6	M	Catalog No.	D	L (指定5mm単位)
40		EGPA	40	105~125
				130~150
				155~175
				180~200
				205~225
				230~250
				255~275
				280~300
				305~325
				330~350
50	M12 深さ25	EGPA	50	105~125
				130~150
				155~175
				180~200
				205~225
				230~250
				255~275
				280~300
				305~325
				330~350
60		EGPA	60	355~400
				405~450
				105~125
				130~150
				155~175
				180~200
				205~225
				230~250
				255~275
				280~300



Order

Catalog No. EGPA  
D 25 - L 200

エジェクタガイドピン