

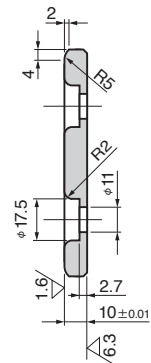
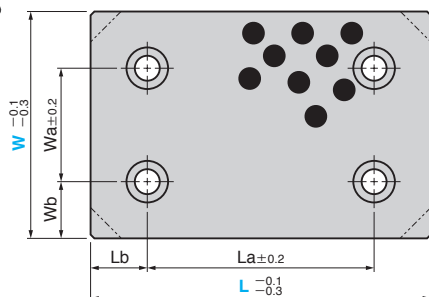
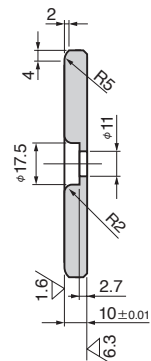
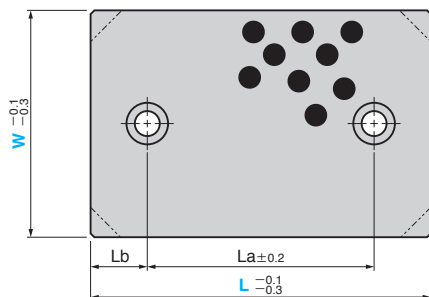


TWP
(銅合金スタンダードタイプ)TWPC
(銅合金スタンダード・
4-C面取タイプ)


● W = 28 ~ 75

W=28 2-R2
W38以上はW100以上の
R面取りと同じです。

● W = 100 以上

TWPT
(銅合金スタンダード・2穴タイプ)TWPTC
(銅合金スタンダード・
2穴4-C面取タイプ)● スライド方向
W = 28・38

W = 48 以上



(両端部R面取り形状)

材 質 銅合金 (SP2)
オイルレス加工
付属品 取付ボルト

Wa	Wb	La	Lb	Catalog No.	W	L
		45	15			75
		50			28	100
		75	25			125
		100				150
		45	15			75
		50			38	100
		75	25			125
		100				150
		45	15			75
		50		TWP		100
		75		TWPC	48	125
		100				150
		150				200
		25				75
		50			75	100
		75				125
		100				150
		150				200
		50	25			100
		75				125
	25	100			100	150
		150		TWP		200
		200		TWPC		250
		100		TWPT		150
	37.5	150		TWPTC	125	200
		200				250
		100				150
100	25	100			150	150
		150				200





Order

Catalog No.	W	-	L
TWP	75	-	150
TWPC	48	-	100
TWPT	100	-	200

● 付属品特殊低頭取付ボルト (LCS 規格)
LCS-10-20

● TWPC、TWPTC 4-C面取り仕様詳細

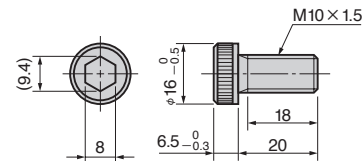

W	C面取り数値
28	10
38	13
48	
75	
100	17
125	
150	

■ 特注品のご相談・ご注文も承ります。