

# オイルレススライドガイド

銅合金L形タイプ


SO#50SP2



## SGLXS



●L=60





●ノック穴


W=20 φ6  $^{+0.012}_0$

W=25・30 φ8  $^{+0.015}_0$

●L=80~100

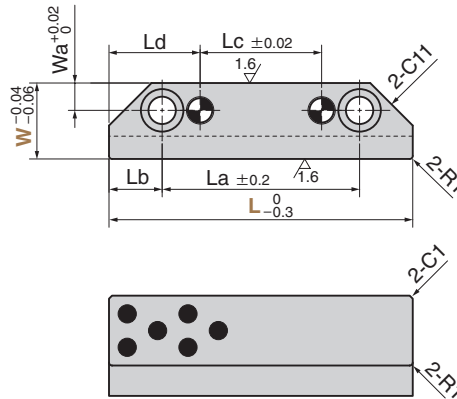

●L=120~200

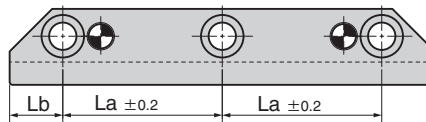

▲ 使用温度は+150℃以下です。  
+150℃を超える場合は潤滑剤の  
埋設仕様が異なります。  
営業までご相談ください。

材質 母材 銅合金(SO-2)  
//// 部固体潤滑剤(GR-1)

| Wa | La   | Lb   | Lc  | Ld | H  | t   | r   | Catalog No. | W  | L   | T  |
|----|------|------|-----|----|----|-----|-----|-------------|----|-----|----|
|    | 20   | 20   | 40  | 10 |    |     |     |             |    | 60  |    |
|    | 50   |      | 20  |    |    |     |     |             |    | 80  |    |
|    | 70   |      | 40  |    |    |     |     |             |    | 100 | 23 |
|    | 45   | 15   | 60  |    | 8  | 5.5 | 0.5 |             | 20 | 120 | 28 |
|    | 55   |      | 80  |    |    |     |     |             |    | 140 |    |
|    | 65   |      | 100 |    |    |     |     |             |    | 160 |    |
| 9  | 45   |      | 20  | 30 |    |     |     |             |    | 80  |    |
|    | 65   |      | 40  |    |    |     |     |             |    | 100 |    |
|    | 42.5 |      | 60  |    |    |     |     |             |    | 120 | 28 |
|    | 52.5 | 17.5 | 80  |    | 10 | 7.5 |     | SGLXS       | 25 | 140 | 33 |
|    | 62.5 |      | 100 |    |    |     |     |             |    | 160 | 43 |
|    | 72.5 |      | 120 |    |    |     |     |             |    | 180 |    |
|    | 82.5 |      | 140 |    |    |     | 0.8 |             |    | 200 |    |
|    | 60   |      | 20  |    |    |     |     |             |    | 100 |    |
|    | 40   |      | 40  |    |    |     |     |             |    | 120 |    |
| 11 | 50   | 20   | 60  | 40 | 15 | 11  |     |             | 30 | 140 | 43 |
|    | 60   |      | 80  |    |    |     |     |             |    | 160 | 53 |
|    | 70   |      | 100 |    |    |     |     |             |    | 180 |    |
|    | 80   |      | 120 |    |    |     |     |             |    | 200 |    |



Order

Catalog No.

SGLXS

W

20

L

120

T

28