




UWP
UWPC (4-C面取りタイプ)

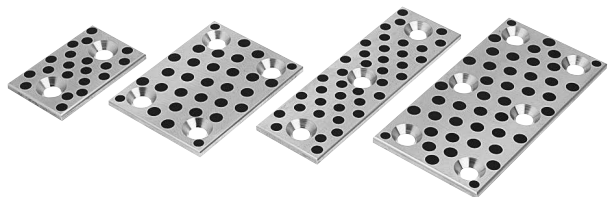


● W= 18 ~ 38, L= 50 ~ 100
W= 48, L= 75 ~ 125





● W= 18 ~ 48, L= 150




● W= 75, L= 75 ~ 125
W= 100, L= 100 ~ 125




● W= 75 · 100, L= 150

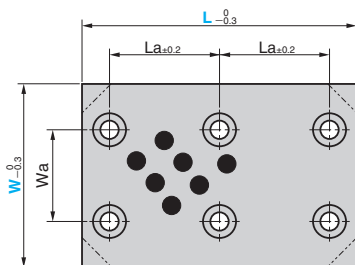

● 皿ボルト



● スライド方向



⚠ 相手側に取付用タップ加工をする場合、
下図要領にて面取り加工を行ってください。

材 質 銅合金 (SP2)
オイルレス加工
付属品 皿ボルト

Wa	La	d	h	取付ボルト	Catalog No.	W	L
-	20	6.5	1.5	M6	UWP	18	50
	45						75
	70						100
-	60						150
	20						50
	45						75
-	70					28	100
	60						150
	20						50
-	45					38	75
	70						100
	60						150
-	45						75
	70						100
	60						150
-	70	10	0.8	M8	UWP UWPC	48	100
	95						125
	60						150
45	75						
45	70					75	100
	95						125
	60						150
70	70						100
	95						125
	60						150

Order	Catalog No.	W	-	L
	UWP	75	-	150
	UWPC	48	-	100

● UWPC 4-C面取り仕様詳細

W	C面取り数値
28	10
38	13
48	
75	17
100	

■ 特注品のご相談・ご注文も承ります。