


スプールリテーナ

SPOOL RETAINER

SPRFH (フランジ・ハードタイプ)


CAD FILE

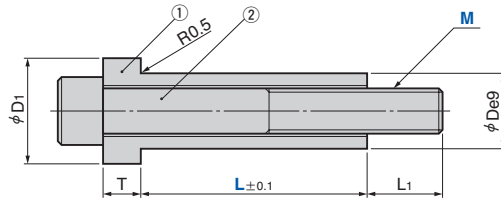

No.	材質	硬さ	表面処理
1	S45C	HRC25~30	
2	SCM435	~M20:HRC38~43 M24~:HRC32~37	四三酸化鉄被膜

SPRFW (フランジ・ワイドタイプ)

CAD FILE

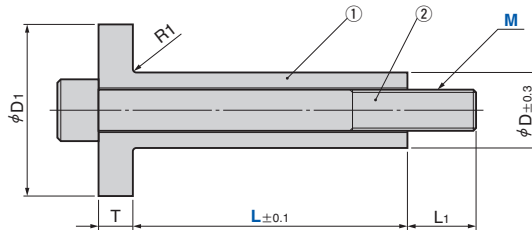

No.	材質	硬さ	表面処理
1	S45C	HRC25~30	
2	SCM435	~M20:HRC38~43 M24~:HRC32~37	四三酸化鉄被膜

Catalog No.	M	L	D	D1	T	L1	相手穴加工寸法 (参考)	許容荷重 N(kgf)/本	
								衝撃・繰返安全率40	静安全率5
SPRFH	12	50~80 (5mm単位指定)	22	33	10	20	24	1945	15561
		90~170 (10mm単位指定)						(198)	(1587)
	16	60~80 (5mm単位指定)	30	44	13	27	32	3646	29164
		90~180 (10mm単位指定)						(372)	(2974)
20	60~80 (5mm単位指定)	36	53	16	34	38	5696	45570	
	90~180 (10mm単位指定)						(581)	(4647)	
24	60~80 (5mm単位指定)	44	64	18	42	46	7018	56146	
	90~180 (10mm単位指定)						(716)	(5725)	
SPRFW	16	80~130 (10mm単位指定)	30	60	13	27	42	3681	29450
								(375)	(3003)
	20	100~150 (10mm単位指定)	36	70	16	34	48	5752	46017
								(587)	(4692)



Order

Catalog No.	M	-	L
SPRFW	20	-	120



Example

